


# APRON FLASHINGS INSTALLATION GUIDE

## APRON FLASHINGS

To complete the detail finish at the top end of a mono pitch roof, where a slope of EUROSIX sheeting meets a vertical wall or vertical sheeting clad to an adjoining building, a EUROSIX Apron Flashing can be used along with a lead (or similar) flashing to seal this particular detail (Fig.1).



Fig.1

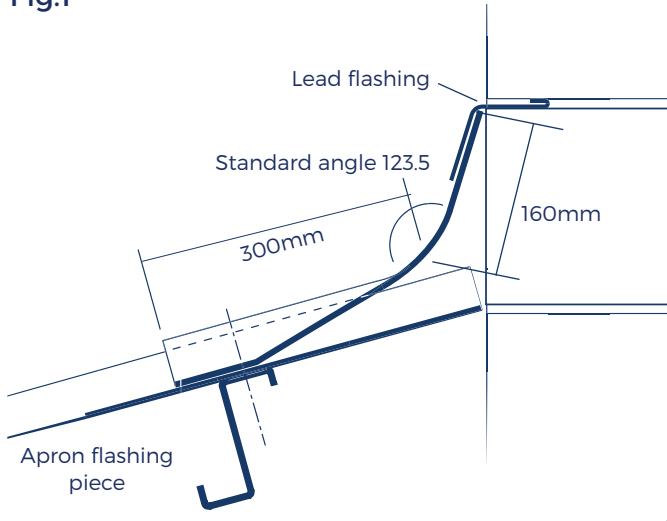

## FLASHING LAP

It is important to note that if working with sheeting from the left to the right you should ensure the apron flashing lap is in line with the sheet lap (Fig.2). However if you are working from right to left you should offset the apron flashing by one corrugation (Fig.3).

Fig.2 Sheets laid left to right

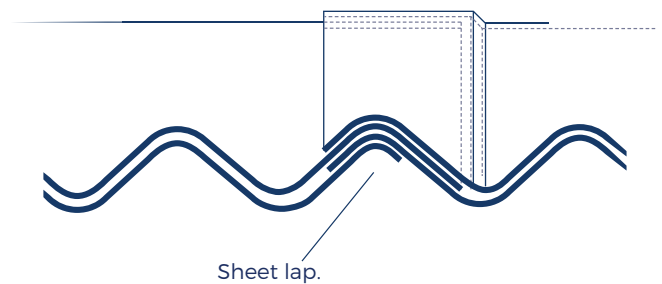


Fig.3 Sheets laid right to left

